

TM-L60II

Label Printer

ESC/POS®



Complies to OLE POS specifications.

Thermal printing and label printing with one compact model.



The compact TM-L60II prints up to 42 columns on thermal paper and 40 columns on labels. It also prints continuous labels. And a forwarding function prevents labels from being fed out unnecessarily. The TM-L60II is also fast-printing 12 lines per second and super-quiet. Moreover, it offers four printing density levels. Then there is page mode, a mode that gives you the freedom to lay out your design anywhere on the page. This versatile model handles a variety of printing formats, from tickets and coupons to any of nine kinds of bar code.

Handles Both Thermal Paper and Labels

This compact printer prints up to 42 columns on thermal paper and up to 40 columns on labels.

Fast, Quiet Printing

The speedy TM-L60 II prints at 12 lps, with the characteristic quietness of a thermal printer.

Wide Choice of Printing Styles

The TM-L60 II's distinctive printing can help differentiate your business with four printing density levels and page mode, a mode that gives you the freedom to layout your design anywhere on the page.

In addition, this printer supports nine different bar codes, including both fence bar codes and ladder bar codes. Supported bar codes include UPC-A, UPC-E, JAN13(EAN), JAN8(EAN), CODE39, ITF, CODABAR, CODE93, and CODE128.

Enhanced Label Printing Function

Labels can be printed continuously. And, since the label feed-out function can remove printed labels, labels need not be forwarded wastefully.




ESC/POS is a registered trademark of SEIKO EPSON CORPORATION.

Easy to Use

Designed for easy label insertion and easy maintenance, the TM-L60 II features an automatic paper positioning system. This light (800 g), ultra-compact printer also boasts a space-efficient design that allows cables to be routed in any of four directions.

ESC/POS®


The TM-L60 II conforms to the world-standard EPSON ESC/POS command system. Moreover, high expandability and easy upgradability ensure efficient use of existing software assets.

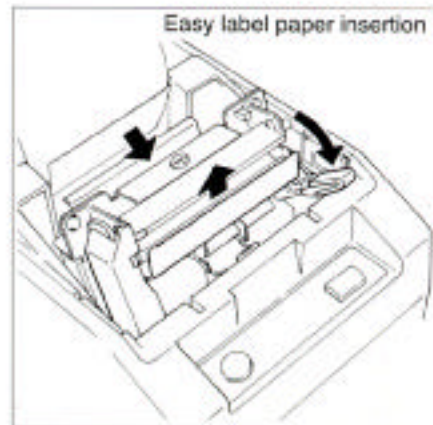

APPEARANCE



CONNECTOR PANEL SERIAL I/F



PARALLEL I/F



OPTION

POWER SUPPLY



INPUT: 100-240V AC
OUTPUT: 24 VDC, 2.0 A
Plug: 3P Power jack
Safety standards: UL, CSA, TÜV

PS-170

Specifications are subject to change without notice.

SEIKO EPSON CORPORATION Web site <http://www.epson.co.jp/world/>

0050 Printed in Japan

For details, please contact:

Freebox Computing Limited
Botley Mills
Botley, SO30 2GB
01489 774000
www.freeboxcomputing.co.uk
sales@freeboxcomputing.co.uk



SPECIFICATIONS

Print Method	Thermal line printing
Print Font	9 x 24 / 12 x 24
Column capacity	Roll paper: 42 / 32 columns Label: 40 / 30 columns
Character size	0.99 (W) x 3.39 (H) mm / 1.41 (W) x 3.39 (H) mm
Character set	95 Alphanumeric characters, 32 International characters, 128 x 7 Graphic characters
Character Per Inch	20.0 cpi / 15.0 cpi
Bar code	UPC-A, UPC-E, JAN8 (EAN8), JAN13 (EAN13), CODE 39, CODE 93, CODE 128, ITF, CODABAR
Print Speed	50 mm / sec. (12 lps with 1/8" paper feed)
Data Buffer	4 KB or 45 bytes
Interface	RS-232, Bi-directional parallel
Paper Dimensions	Roll paper: 60 ± 0.1 mm x dia. 83 mm Label: 60 ± 0.1 mm x dia. 83 mm
Paper Thickness	Label: 0.143 ± 0.015 mm
Power	24 VDC ± 7 %
Power Consumption	Approx. 1.0 A (mean)
D. K. D. Function	2 drivers
Reliability MTBF	18 x 10 ⁴ hours MCBF 29 x 10 ⁴ lines (thermal paper), 12 x 10 ⁴ lines (thermal label)
Overall Dimensions	123 (W) x 201 (D) x 124 (H) mm
Mass	Approx. 0.8 kg
EMC Standards	VCCI class A, FCC class A, CE marking, AS / NZS 3548 class B
Safety Standards	UL, CSA, TÜV (EN60950)